

W-MP300

Microphone Monitor Kit




This product contains HIFI process chip with low noise performance. The chip can restrain noise around environment through frequency response network for several times, and provides pure tone quality and powerful movement. The product contains dedicated AGC circuit so it is suitable for different types of Mic supervised listening environments, such as bank, prison, examination place, shopping mall, and industry factory etc.

Moreover, this product has lots of virtues, including low noise, HIFI, wide range operation voltage, small electricity consumption add long distance transmission. is a new kind of listen equipment that has adjustable sensitivity. It is a good partner to be used with supervised TV and security protection systems. Designed to be used in combination with security cameras to achieve audio and video synchronization to monitor speaking within 5~100m².

W-MP300

Microphone Monitor Kit

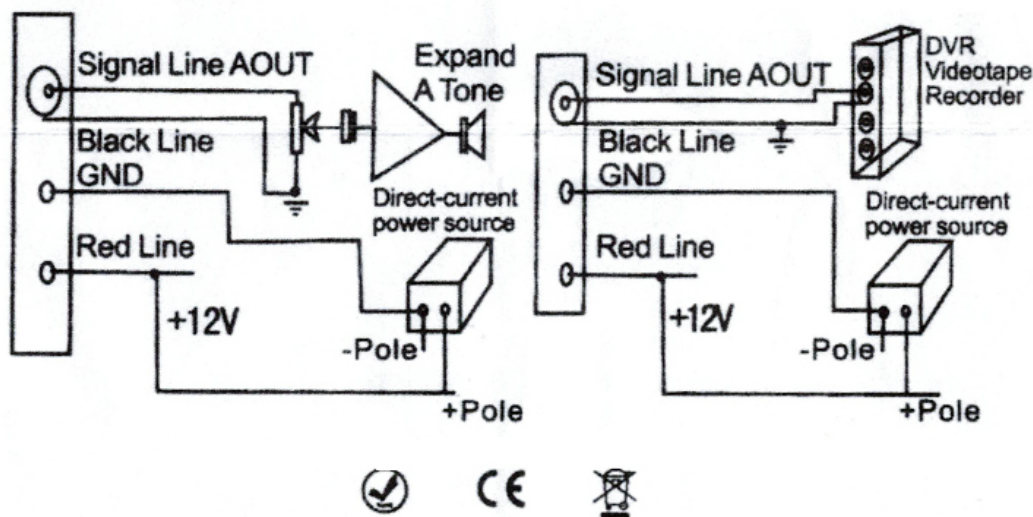

- Red line: power +
- Black line: power -
- White shield wire: Audio system input port
- Power supply:DC6v~12V
- Dissipation circuit: 10mA
- Frequency response:300~5500Hz
- Output signal Output impedance: 600ohms
- Out level: 0~6V
- Environment: -25 °C~85°C
- Humidity: 30~90%

Winic Technologies USA Inc.

42 Central avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email:sales@winictech.com

www.winictech.com