

IPC-HFW3200S

2Megapixel Full HD Network Small IR-Bullet Camera



Features

- 1/3" 2Megapixel progressive scan Exmor CMOS
- H.264 & MJPEG dual-stream encoding
- 30fps@1080P(1920×1080)
- DWDR, Day/Night(ICR), 2DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 6mm fixed lens (3.6mm,8mm optional)
- Max. IR LEDs Length 20m
- IP66, PoE

IPC-HFW3200S


Technical Specifications

Model		IPC-HFW3200S
Camera		
Image Sensor		1/3" 2Megapixel Exmor CMOS
Effective Pixels		1920(H)x1080(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual, 1/4~1/10000s
Min. Illumination		0. 1Lux/F1.2 (Color), 0.01Lux/F1.2(B/W);0Lux/F1.2(IR on)
S/N Ratio		>50dB
Camera Features		
Max. IR LEDs Length		20m
Day/Night		Auto(ICR)/Color/B/W
Backlight Compensation		BLC / HLC / DWDR
White Balance		Auto
Gain Control		Auto/Manual
Noise Reduction		2D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		6mm (3.6mm,8mm)
Max Aperture		F1.6
Angle of View		H: 57°(96°/43°)
Lens Type		Fixed lens
Mount Type		Board-in Type
Video		
Compression		H.264 / MJPEG
Resolution		1080P(1920×1080) 720P(1280×720) D1(704×480) / CIF(352×240) /
Frame Rate	Main Stream	1080P/720P(1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate		H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 20480Kbps
Network		
Ethernet		RJ-45 (10/100Base-T)
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF		ONVIF Ver. 2.0
Max. User Access		10 users
Smart Phone		iPhone, iPad, Android, Windows Phone
General		
Power Supply		DC12V, PoE (802.3af)
Power Consumption		<6W

IPC-HFW3200S

Working Environment	-10°C~+60°C, 10%~90%
Ingress Protection	IP66
Dimensions	Φ63.5mm×160mm
Weight	0.4kg

Dimensions (mm)

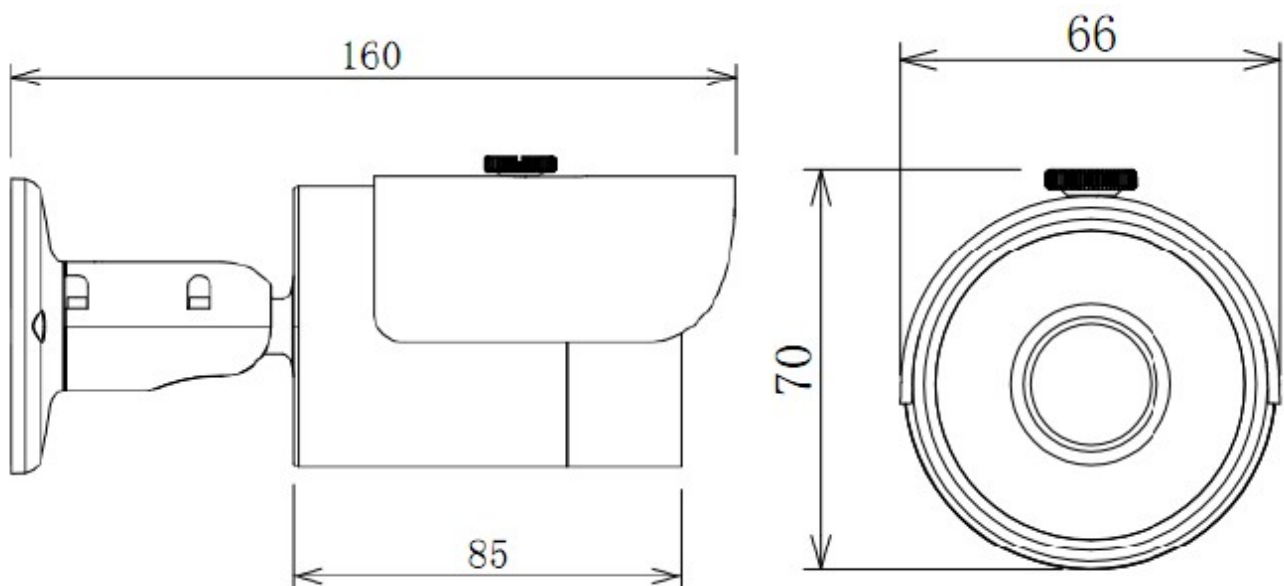

Winic Technologies USA Inc.

42 Central avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email:sales@winictech.com

www.winictech.com

*Design and specifications are subject to change without notice.