


## W-24VAC-9P/2.5A

### Camera Power Supply

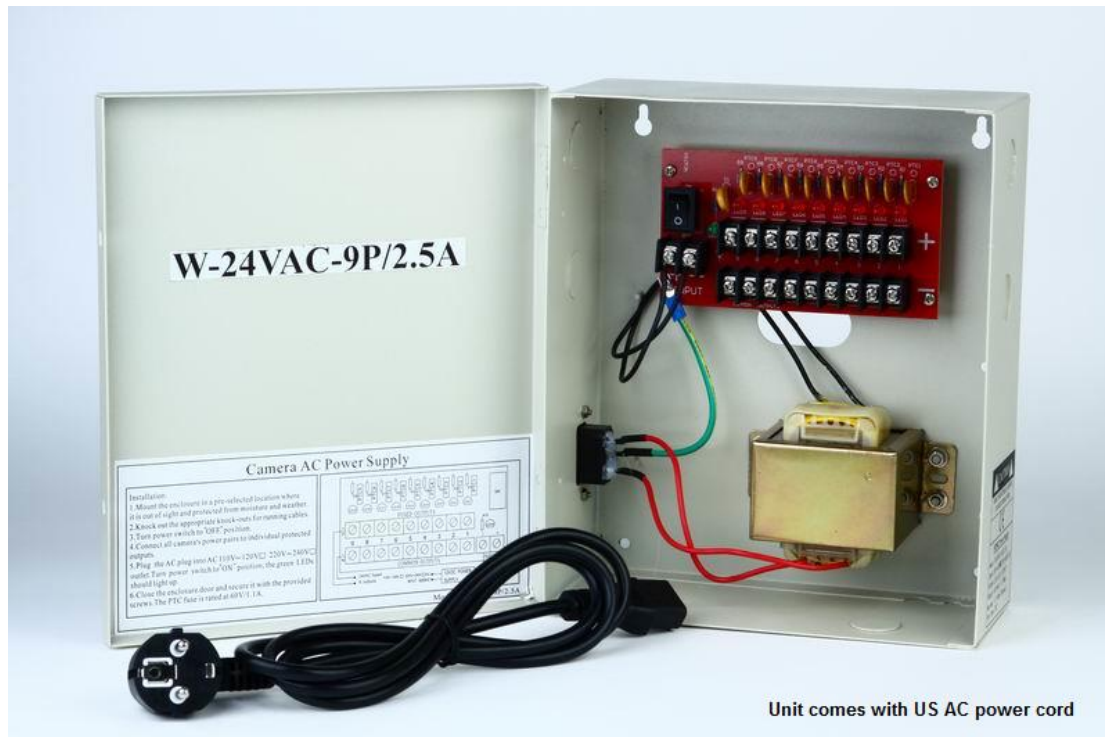

### Model

W-24VAC-9P/2.5A

### Features

- > Input 110/120 VAC
- > Output 24V DC, 9channels
- > 2.5 Amp Supply Current
- > Integral Surge Protection
- > Individual LED Power Indication
- > Individual PTC Output Protection
- > Max. Amp: 1.1Amp/ch



## W-24VAC-9P/2.5A

### Specifications

Model	W-24VAC-9P/2.5A	
Specification	60W24V2.5A9P	
Shape Dimension	24.5×20.8×8.7cm	
Weight	2.94kg	
Input	Input Voltage	110/120VAC
	Input Voltage Frequency	60Hz
Output	Output Voltage	24VAC±5%
	Output Current	2.5A, 9channels for 9sets load
Fuse	Type /Rating	PTC 1.1A/60V
Protection	Over current protection	When over current occurs, the corresponding channel output will automatically switch to self-protection status, and the other channels output work normally, when clearing of fault, it switches back to normal.
	short-circuit protection	When short-circuit occurs, individual PTC fuse will break the circuit, when clearing of fault, it switch back to normal automatically.
Circumstances	Working Temperature	0°C~+40°C
	Storage temperature	-20°C~+85°C
	RH	5%~95%
	Heat release	Natural heat dissipation
Connection	Input	Three-pin socket
	Output	9channels output

#### Winic Technologies USA Inc.

42 Central Avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email:sales@winictech.com

[www.winictech.com](http://www.winictech.com)

\*Design and specifications are subject to change without notice.