

HDC-DI08/2M/2.8-B

2.4 Megapixel 1080P HD 4 In 1 Camera



- 1/2.7" 2.4Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- 3.6mm lens
- Rue Day/Night
- 8x IR 20ft
- OSD menu, 2DNR
- IP66 weatherproof
- CoC Compatible (Control Over Coax)
- Support AHD/ CVI/ TVI/ CVBS/ Analog transfer



HDC-DI08/2M/2.8-B

2.4 Megapixel 1080P HD 4 In 1 Camera

Specifications

Camera	
Image Sensor	1/2.7" 2.4 MP CMOS Image Sensor
Signal system	PAL/NTSC
Effective Pixel	1944(H)×1092(V)
Min.Illumination	Color:0.1lux.BW:0.5lux.Color.DSS:0.017lux.BW DSS:0.0008lux
Shutter Time	PAL:1/50s~1/10,000s/NTSC:1/60s~1/10,000s
Lens	3.6mm
Lens Mount	Ø 5
Day/night	Auto/Color/B&W/EXTERN 8x IR 20ft
Wide Dynamic Range	Yes(70dB)
Video Frame Rate	PAL:25fps@1080P/NTSC:30fps@1080P
HD Video Output	AHD/ CVI/ TVI/ CVBS(Long press the confirmation key switching TVI/AHD /CVI)
Synchronization	Internal
Noise Reduction	Off/Low/Middle/High
Up the Coax	Support
Menu	
Auto White Balance	Auto/MWB
OSD	Yes
language	English/Chinese/Korean.etc
General	
Power Supply	DC12V±10%
Power Consumption	300mA
Working Temperature	-10° C~+45° C
Ingress Protection	IP66
Max.IR LEDs length	5-8m
Transmission Distance	Over 300m via 75-3 coaxial cable



Packing Information

Unit G.W.	0.172KG
Dimensions	59mm*56mm
Package/CTN	36PCS/CTN
CTN G.W.	10KG
Meas.	46.5*35*27.8mm

HDC-DI08/2M/2.8-B

2.4 Megapixel 1080P HD 4 In 1 Camera

Dimensions (mm)

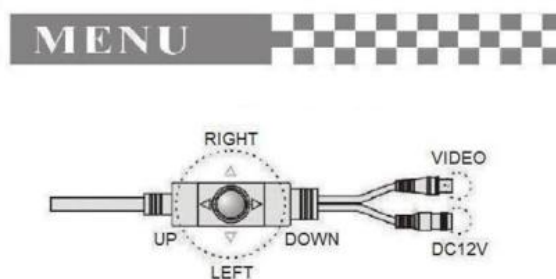

1. Long time (6 seconds) press the Right button to TVI (Factory default output).
2. Long time (6 seconds) press the left button to AHD.
3. Long time (6 seconds) press the up button to CVBS.
4. Long time (6 seconds) press the Down button to CVI.

Winic Technologies USA Inc.

42 Central avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email: sales@winictech.com

www.winictech.com

* Design and specifications are subject to change without notice.