

# PREMADE CABLE

---

VP Cable, BNC (Male to Male) + DC (Male to Female)



## Features

- For 1081P HD camera
- Easy to install
- Independent earth wire
- Anti-interference ability


# PREMADE CABLE

## VP Cable, BNC (Male to Male) + DC (Male to Female)

### Cable Specifications

Models	W-VP25HD/B-V2	W-VP50HD/B-V2	W-VP100HD/B-V2	W-VP150HD/B-V2
	W-VP25HD/W-V2	W-VP50HD/W-V2	W-VP100HD/W-V2	W-VP150HD/W-V2
<b>Cable Construction</b>				
<b>FOR Video Side</b>				
Conductor	1C*8/0.12 Pure Copper with Shield (38/0.12 CCA)			
Insulation	PE, ID: 1.5±0.05mm			
Jacket	PVC, OD: 3.1±0.1mm			
<b>FOR Power Side</b>				
Conductor	(30/0.14 BC) Red + (25/0.14CCA) Black			
Insulation	PVC, Red: ID 1.42mm, Black 1.25mm			
Jacket	PVC, OD:4.1±0.1mm			
<b>Connectors</b>	<b>Iron &amp; Copper</b>			
<b>Electrical Characteristic</b>				
Impedance	50 or 75 +/-2 Ohm			
Operating temperature	-20°C + 75°C			
<b>Standard Reference</b>				
1. CE				
2. RoHS				
<b>Applications</b>				
1. Closed Circuit Television				
2. CCTV Cameras				
<b>Packing Way</b>				
1. Plastic bag with label				
2. Carton				
3.Packing Qty.(PCS/CTN)	30	30	10	10

### Dimensions (mm)

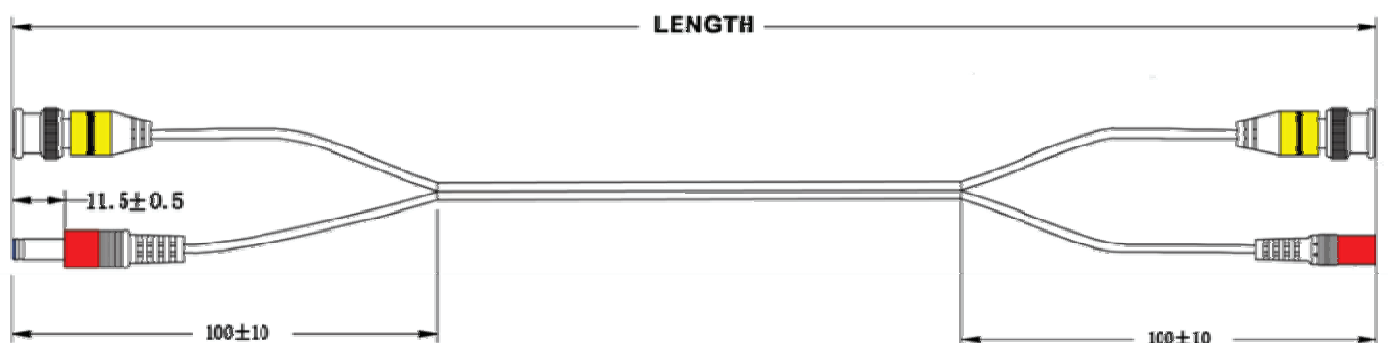

**Winic Technologies USA Inc.**

1(631)396-0800 | 42 Central Ave. Farmingdale, NY 11735 | [www.winictech.com](http://www.winictech.com)