

POE-SW8PG-2G-250

Series 8 port gigabit Uplink PoE Switch



Features

- Auto detect powered device(PD)
- Safe and reliable power to most of PoE end device
- Plug & Play. No configuration required
- Fully IEEE802.3af/at compliant
- Designed for IP security with 10/100/1000Mbps Uplink

Introduction

This PoE switch provides power and data from a single point, using Power over Ethernet(PoE) over a single Cat-5 cable. POE-SW8PG-2G-250 series is designed for any IP security Industry with Gigabit Uplink network. In addition, the PoE switch automatically determines PoE requirements, speed, duplex. Easy to operate and reliable.

This PoE switch is ideal for powering PoE devices such as IP cameras, WLAN access points, IP phones, office access control systems, and other PD devices and offers a line of high quality products that provide a total solution for Ethernet application in different environments.




POE-SW8PG-2G-250

Series 8 port gigabit Uplink PoE Switch

Specifications:

Model	POE-SW8PG-2G-250		
Port Description	PoE Port	1000M RJ45	Port 1-8
	Link/Act Port	1000M RJ45	Port1-8
	Uplink Port	1000M RJ45	Port 8
PoE Feature	MAX PoE Ouput		30W
	Total Power consumption		250W
	PoE Port Priority		Support
Bandwidth	Port 1-8 10/100M Auto-Negotiation		
LED Indicator	Power、PoE Status、Link/Act、PoE MAX		
Processing Types	Store and Forward		
Transmission Mode	Full duplex/Half duplex		
Performance Spec.	Bandwidth	20Gbps	
	Packet Forwarding Rate	14.88M	
	MAC Address	4K	
Netowrk Standard	IEEE802.3i 10 BASE-T IEEE802.3u 100 BASE-TX IEEE802.3ab 1000 BASE-T IEEE802.3x Flow Control IEEE802.3af Power over Ethernet IEEE802.3at Power over Ethernet IEEE802.3az EEE		
Power Input	AC90-260V input		
Cables	UTP cat.5 or abover		
Environment Spec	Working Temperature: -10℃-45℃ Storage Temperature: 10%-90%,non-condensing		
	Working Humidity: -20℃-70℃ Storage Temperature: 5%-95%, non-condensing		
Operating temperature	-10-40℃		
Storage temperature	-20-70℃		
Regulatory Approval			
Safety	CE/ROHs/FCC		
Warranty	1 year		

Application Diagram:

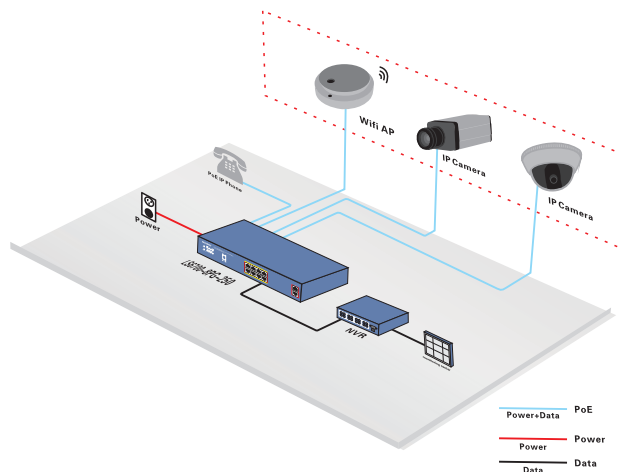

Winic Technologies USA Inc.

42 Central avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email:sales@winictech.com

www.winictech.com

Design and specifications are subject to change without notice.