

## NR710-64

### 64 Channel 320M 2U 4K Super Network Video Recorder



#### Key Features

##### Professional and Reliable

- Dual-OS design to ensure high reliability of system running
- ANR technology to enhance the storage reliability when the network is disconnected
- RAID0, RAID1, RAID5 and RAID10 storage scheme configurable

##### HD Input

- H.265/H.264+/H.264/MPEG4 video formats
- Connectable to the third-party network cameras
- 64 IP cameras can be connected
- Recording at up to 12 MP resolution
- Supports live view, storage, and playback of the connected camera at up to 12 MP resolution

##### HD Output

- HDMI1/VGA1 and HDMI2/VGA2 outputs provided
- HDMI1 Video output at up to 4K (3840 × 2160) resolution

##### HD Storage

- Up to 8 SATA interfaces and 1 eSATA interface connectible for recording and backup
- Storage space effectively saved by 50% to 70% with the use of H.264+ decoding format

##### HD Transmission

- 2 self-adaptive 10M/100M/1000M network interfaces, and two working modes are configurable: multi-address and network fault tolerance

##### Various Applications

- Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Connectable to smart IP cameras from Hikvision and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Instant playback for assigned channel during multi-channel display mode
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Supports HDD quota and group modes; different capacity can be assigned to different channels

## 64 Channel 320M 2U 4K Super Network Video Recorder


## Specifications

Model		NR710-64
Video/Audio input	IP video input	64-ch Up to 12 MP resolution
	Two-way audio	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	Incoming bandwidth	320 Mbps, or 200 Mbps (when RAID is enabled)
	Outgoing bandwidth	256 Mbps, or 200 Mbps (when RAID is enabled)
	Remote connection	128
Video/Audio output	Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	VGA1 /HDMI1 output resolution	HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA1: 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
	VGA2 /HDMI2 output resolution	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
	Audio output	2-ch, RCA (2.0Vp-p, 1 KΩ)
Decoding	Decoding format	H.265/H.264/MPEG4
	Live view / Playback resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Synchronous playback	16-ch
	Capability	4-ch @4K, or 16-ch @ 1080p
Hard disk	SATA	8 SATA interfaces for 8HDDs
	eSATA	1 eSATA interface
	Capacity	Up to 6TB capacity for each HDD
Disk array	Array type	RAID0, RAID1, RAID5, RAID10
	Number of arrays	4
External interface	Network interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
	Serial interface	RS-232; RS-485; Keyboard
	USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
	Alarm in/out	16/4
General	Power supply	100 to 240 VAC, 50 to 60 Hz
	Max. Power	200 W
	Consumption (without hard disk)	≤30 W
	Working temperature	-10 to +55°C (14 to 131°F)
	Working humidity	10 to 90 %
	Chassis	19-inch rack-mounted 2U chassis
	Dimensions(W × D × H)	445 × 470 × 90 mm (17.5" × 18.5" × 3.5")
	Weight(without hard disk)	≤ 10 Kg (22 lb)

# NR710-64

## 64 Channel 320M 2U 4K Super Network Video Recorder

### Physical Interfaces

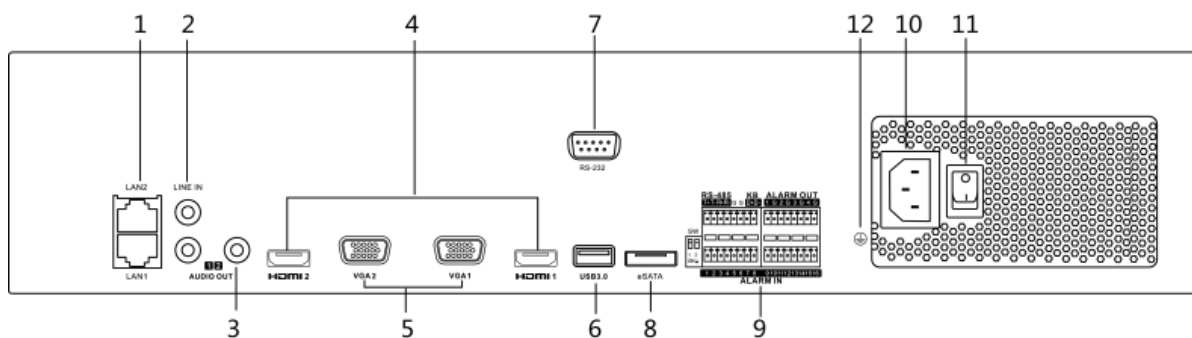

Index	Description
1	LAN1/LAN2 Interface, 2 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interfaces provided.
2	LINE IN, RCA connector for audio input.
3	AUDIO OUT, RCA connector for audio output.
4	HDMI1/HDMI2, HDMI video output connector.
5	VGA1/VGA2, DB9 connector for VGA output. Display local video output and menu.
6	USB 3.0 Interface
7	RS-232 Interface
8	eSATA Interface
9	Controller Port, Alarm In/Alarm Out
10	100 to 240 VAC power supply
11	Power Switch
12	GND

#### Winic Technologies USA Inc.

42 Central Avenue, Farmingdale, New York 11735 Tel:

+631-396-0800

Fax: +631-396-0805

Email: sales@winictech.com

www.winictech.com

Design and specifications are subject to change without notice.