

# 1662ZJ


## Pendent Mount Bracket



### Features:

- Aluminum alloy material with surface spray treatment
- General design for indoor/outdoor
- Design of cable entrance hole
- Better water proof with rubber pad design
- With safety rope, the assembling is safer and more convenient

### Dimension:

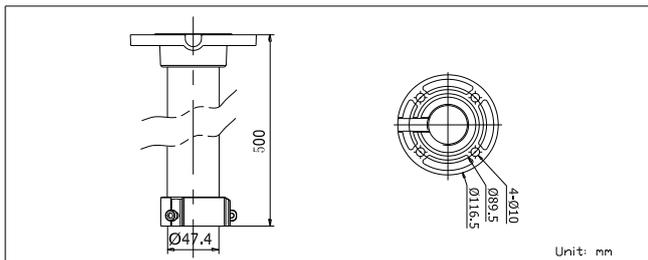

### Parameters:


Model	1662ZJ
Parameter	Pendent Mount (50cm)
Color	Hik white
Feature	Suit for 500mm pendent mount
Material	Aluminum alloy
Dimension	116.5x500mm
Weight	960g

### Notice:

- Pay attention to the color matching when select bracket
- The bracket should be installed on the flat surface of a wall
- The wall must be capable of supporting more than 3 times the total load of the camera and the mount. The maximum load capacity of the mount is 30KG


### Installation steps:

- ① Choose the appropriate wall to mount the ceiling, and rubber blanket should be added when assembling outdoors




Note A: Waterproof rubber blanket

- ② Twist and fix the screwed pipe after threading




Note B: Screw hole

- ③ Fasten the safety rope, thread the line and assemble the speed dome



C: Safety rope hook D: Safety rope

- ④ Fasten the snap joint fixing screw



E :Snap joint fixing screw.

**Note:** The figure of Speed Dome in "Installation Step" is only for your reference; please adhere to our real products.