

16CH Tribrid HD CVI & Analog & IP 1.5U DVR



Features


- > Tribrid: Each channel supports HDCVI/Analog/IP Video input
- > 1HDMI/VGA/TV simultaneous video output,1 HDMI separate output
- > CVR704L-16:All channel Max 1080P
- > Up to 1080p realtime live view
- > H.264 dual-stream video compression
- > 4/8 channel synchronous realtime playback, GRID interface & smart search
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech , and etc.
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 4 SATA HDDs up to 16TB, 1 eSATA up to 16TB,3 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

Technical Specifications

Model		CVR704L-16
System		
Main Processor		Embedded processor
Operating System		Embedded LINUX
Video		
Input		16 channel
Video Standard	HDCVI	1080P/720P HDCVI Camera
	Analog	NTSC(525Line, 60f/s), PAL(625Line, 50f/s), Effio 960H Camera
	IP	1080P/720P/D1/CIF IP Camera
Audio		
Input		4 channel, BNC
Output		1 channel, BNC
Two-way Talk		1 channel input, 1 channel output, BNC
Display		
Interface		2 HDMI, 1 VGA, 1 TV
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768, 800×600
Display Split		1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording		
Video/Audio Compression		H.264/G.711
Resolution		1080P(1920×1080)/720P(1280×720)/960H(960×576/960×480)/D1/4CIF(704×576/704×480)/CIF(352×288/352×240)/QCIF(176×144/176×120)
Record Rate	Main Stream:	1080P/720P/960H/D1/HD1/2CIF/CIF(1~25/30fps)
	Extra Stream	CIF/QCIF(1~25/30fps)
Bit Rate		48~8192Kb/s
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop
Record Interval		1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Video Detection & Alarm		
Trigger Events		Recording, PTZ, Tour, Video Push, Email, FTP, Spot, Buzzer & Screen tips
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Alarm Input		16 channel
Relay Output		6 channel
Playback & Backup		
Sync Playback		1/4/9/16
Search Mode		Time/Date, MD & Exact search (accurate to second)
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup

	selection, Digital zoom
Backup Mode	USB Device/eSATA Device/Internal SATA burner/Network
Network	
Ethernet	RJ-45 port (10/100M/1000M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	4 SATA ports, up to 16TB
External HDD	1 eSATA port, up to 16TB
Auxiliary Interface	
USB Interface	3 ports(2 Rear),USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port RS485 for PTZ control,1 port RS422 for Keyboard
General	
Power Supply	AC 100~240 V, 50/60 Hz
Power Consumption	40W(without HDD)
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa
Dimension(W×D×H)	1.5U, 440mm×410mm×70mm
Weight	6KG(without HDD)

System Connection

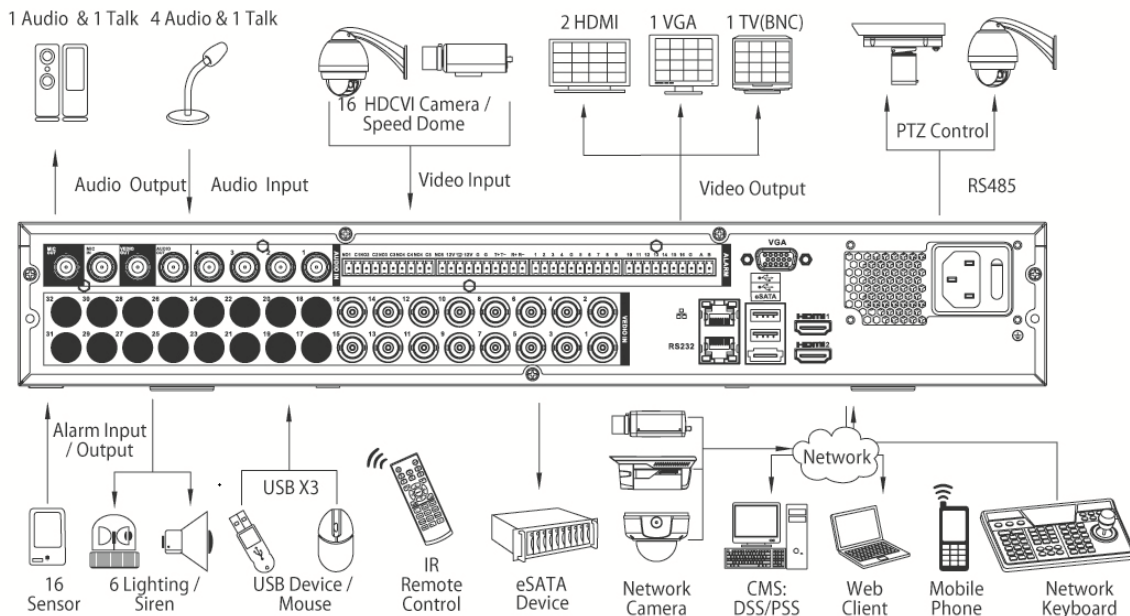

*Takes CVR704L-16 as an example

Winic Technologies USA Inc.

42 Central Avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email:sales@winictech.com

www.winictech.com