


AR326-8/E

8CH 8MP 1U H.265 DVR

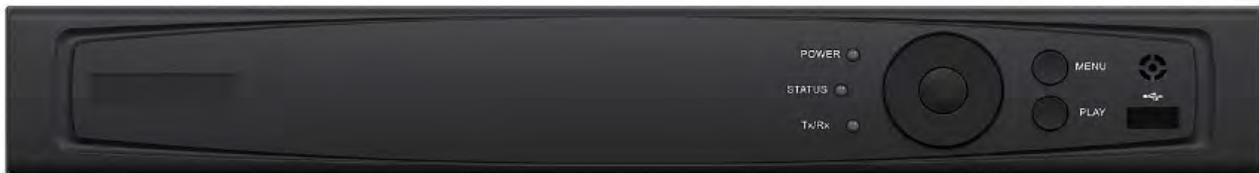

Features and Functions

Video Input and Transmission

- Self-adaptive HDTVI/HDCVI/AHD/CVBS signal input
- Up to 2-ch 8 MP IP cameras input
- 8 MP/5 MP/4 MP HDTVI video input and live view
- Defogging function enabled for the supported analog cameras
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTVI signal

Compression and Recording

- H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265+ can be enabled to improve encoding efficiency and reduce data storage costs
- Full channel recording at up to 8 MP resolution

Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 × 2160) resolution
- Separate CVBS output

Storage and Playback

- 1 SATA interfaces (up to 8 TB capacity per HDD)
- 8-ch synchronous playback
- Smart search for efficient playback
- Support the 3rd party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

Smart Function

- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Support line crossing detection and intrusion detection of all channels, and 2-ch sudden scene change detection
- VCA information overlay in live view and smart playback
- VQD (Video Quality Diagnostics)
- Support PTZ control via Omnicast VMS or Genetec protocol

Network & Ethernet Access

- GuardingVision & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M/1000M self-adaptive Ethernet interface
- Output bandwidth limit configurable

AR326-8/E

8CH 8MP 1U H.265 DVR


Specifications

Model	AR326-8/E	
Video/Audio input	Video compression	H.265+/H.265/H.264+/H.264
	Analog video input	8-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxial connection
	HDTVI input	8MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25
	AHD input	5MP, 4MP, 1080p25, 1080p30, 720p25, 720p30
	HDCVI input	5MP, 4MP, 1080p25, 1080p30, 720p25, 720p30
	CVBS input	PAL/NTSC
		2-ch
	IP video input	Up to 8 MP resolution
		Supports H.265+/H.265/H.264+/H.264 IP cameras
	Audio compression	G.711u
Video/Audio output	Audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)
	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
	HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
	Encoding resolution	8MP/ 5 MP/ 4 MP/ 3 MP/ 1080p/ 720p/ WD1/ 4CIF/ VGA/ CIF
	Frame rate	Main stream: 8 MP@8fps/ 5 MP@12fps/ 4 MP@15fps/ 3 MP@18fps 1080p/ 720p/ WD1/ 4CIF/ VGA/ CIF@25fps (P)/ 30fps (N) Sub-stream: WD1/ 4CIF/ CIF@25fps (P)/ 30fps (N)
	Video bit rate	32 Kbps to 10 Mbps
	Audio output	1-ch, RCA (Linear, 1 KΩ)
	Audio bit rate	64 Kbps
	Dual stream	Support
	Stream type	Video, Video & Audio
Network management	Synchronous playback	8-ch
	Remote connections	128
	Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
Hard disk	SATA	1 SATA interfaces
	Capacity	Up to 8 TB capacity for each disk
External interface	audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)
	Network interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface
	USB interface	2 × USB 2.0
	Serial interface	N/A
	Alarm in/out	N/A
General	Power supply	12 VDC
	Consumption (without HDD)	≤ 20 W
	Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)
	Working humidity	10% to 90%
	Dimensions (W × D × H)	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)
	Weight (without HDD)	≤ 1.16 kg (2.6 lb)

AR326-8/E

8CH 8MP 1U H.265 DVR

Physical Interfaces

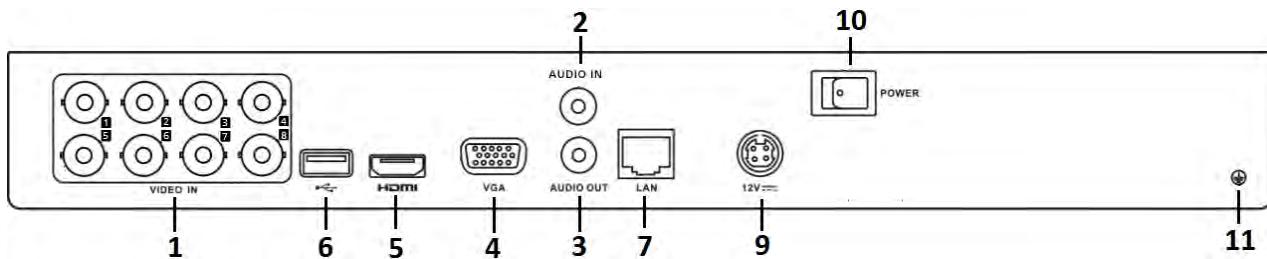

The rear panel of AR326-8E.

Index	Description	Index	Description
1	VIDEO IN	8	
2	AUDIO IN	9	12 VDC Power Input
3	AUDIO OUT	10	Power Switch
4	VGA Interface	11	GND
5	HDMI Interface	12	VIDEO OUT
6	USB Interface	13	
7	LAN Network Interface		