

W-HDPVB303P

HD-CVI, HD-TVI & AHD 1 ch video transmitter/receiver



The W-HDPVB303P is a passive HD video balun with power.


Features:

- Transmission distance: HDCVI 720P: 400m/1080P: 250m
- HDTVI 720P/1080P: 250m
- AHD 720P: 350m/1080P: 200m
- Power transmission up to 100m
- It support power supply on 12VDC or 24VAC
- Built-in surge & transient protection
- Super interference rejection
- LED indicate whether working (green light) or not working (yellow light)

W-HDPVB303P

HD-CVI, HD-TVI & AHD 1 ch video transmitter/receiver

Passive HD Video Balun with Power



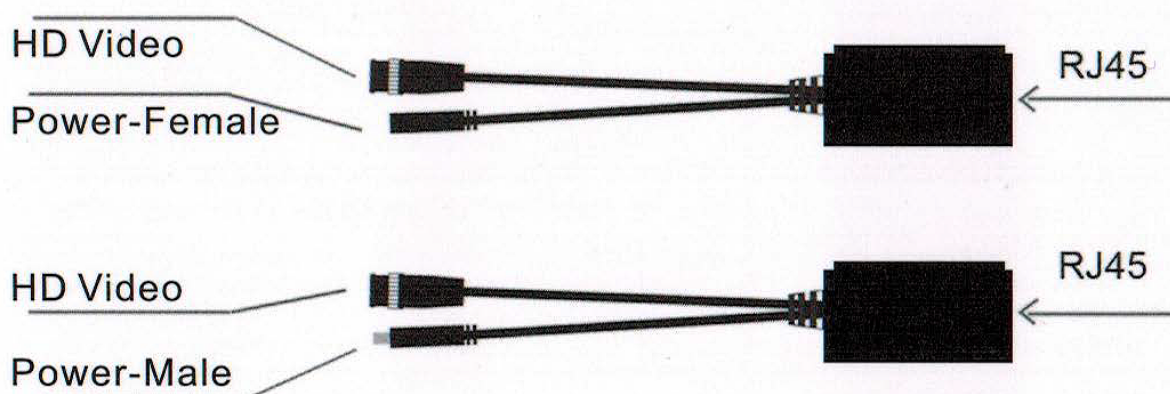


Features:

- Transmission distance: HDCVI 720P: 400m/1080P: 250m/4MP:200m;
HDTVI 720P/1080P: 250m/4MP:200m;
AHD 720P: 350m/1080P: 200m/4MP:200m
- Power transmission up to 100m
- It support power supply on 12V DC or 24V AC
- Built-in surge&transient protection
- Super interference rejection
- LED indicate whether working (green light) or not working (yellow light)

W-HDPVB303P

HD-CVI, HD-TVI & AHD 1 ch video transmitter/receiver



	1	2	3	4	5	6	7	8
T568A:	White Green	Green	White Orange	Blue	White Blue	Orange	White Brown	Brown
T568B:	White Orange	Orange	White Green	Blue	White Blue	Green	White Brown	Brown

Voltage Drop According to Cable Length (24AWG):

Transmission Distance	Transmission Voltage (12V DC, 0.5A)	Transmission Voltage (12V DC, 1A)	Transmission Voltage (12V DC, 1.5A)
50M / 160Ft	13.5V	15.5V	17.0V
100M / 320Ft	15.5V	18.5V	22.0V
150M / 500Ft	17.0V	22.0V	27.0V
200M / 650Ft	18.5V	25.5V	32.0V

Caution:

- It is not waterproof and not to be used outdoors
- Do not operate the device with wet hands
- If using T568A standard, make sure the other end is matched to T568A
- If using T568B standard, make sure the other end is matched to T568B