


WNC2016-EV 2.8MM

6MP Elevator IP Camera

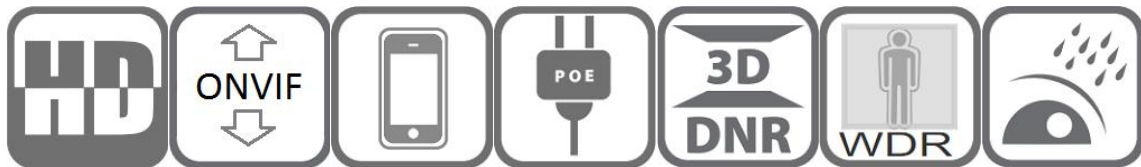

Features:

- 1/2.8" Sony CMOS sensor
- 6MP realtime resolution 3072x2048
- Low illumination 0.01Lux
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR,Shutter, IR-CUT
- D-WDR,Mirror, rotate, Defogging
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE,Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 1pc IR Leds, IR distance 5-6 meters
- HD 2.8mm fixed lens
- Human body detection, Vehicle detection

WNC2016-EV 2.8MM



6MP Elevator IP Camera

Technical Specifications:

| | |
|--|---|
| Model | WNC2016-EV 2.8mm |
| Camera | |
| Image Sensor | 1/2.8" Sony CMOS |
| Effective Pixels | 6 megapixels |
| Electronic Shutter | AUTO, 1/25s ~ 1/100000s |
| Min. Illumination | 0.01Lux@F1.2(AGC ON), 0Lux IR on |
| Day/Night | Auto/Color/(B/W)/Timing |
| WDR | Digital WDR |
| White Balance | Auto/Manual |
| BLC /HLC | Support |
| DNR | 2D/3D DNR |
| Other | AGC,Motion Detection,Privacy Mask,Flip ,OSD overlay |
| Encode | |
| Video Standard | H.264/H.265 |
| Video Resolution | Main Stream: 25fps@6MP(3072x2048)/25fps@5MP(2592x1944)/4MP(2592x1520)/3MP , 30fps@1080P/720P Sub stream: 25fps@D1/VGA/360P/CIF, etc. |
| Video Bitrates | 512Kbps - 12Mbps, VBR/CBR |
| Audio Standard | G.711-u/G.711-a |
| Built-in Mic | No |
| OSD Overlay | Title and Time overlay |
| IR Led | |
| IR Led | 1 pc IR Led |
| IR Distance | 5-6M |
| Lens | |
| Focal length | 2.8mm fixed lens |
| Optional Function | |
| PoE, Human body detection, Vehicle detection | |
| Network Services | |
| Protocol | HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc. |
| P2P | Yes |
| Web | IE , Firefox (32bit esr), etc. |
| Media | CMS, Android, IOS |
| ONVIF | 17.06 compatible |
| General | |
| Network Port | 1-RJ45, 100Mbps, POE optional |
| Power Supply | 12 VDC ± 10% |
| Power Consumption | < 8 W |
| Operating Temp. | -30°C-(+60)°C, 10%-90%RH |