


WNC2015-PIR 3.7mm

5MP pin-hole IP Camera

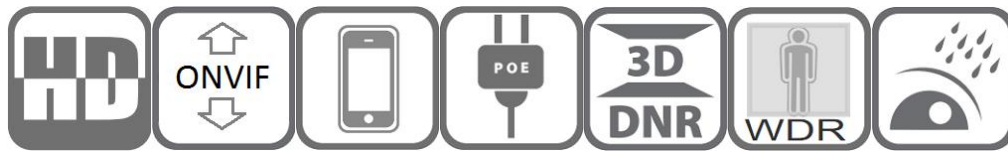

Features:

- ❖ 1/3" CMOS sensor
- ❖ Max. 5MP resolution 2592 x 1944 output
- ❖ low illumination 0.01Lux
- ❖ 5MP HD resolution 2592 x 1944 realtime output
- ❖ Ultra low illumination 0.01Lux
- ❖ Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Human Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ RJ45 100mbps network port, IEEE802.3af PoE
- ❖ Lightning protection 4000V
- ❖ Plastic housing, IP65
- ❖ 12pcs IR Leds, IR distance 10-15 meters
- ❖ HD 3.7mm Pin-hole lens



WNC2015-PIR 3.7mm

5MP pin-hole IP Camera

Technical Specifications:

Model	WNC2015-PIR 3.7mm
Camera	
Image Sensor	1/3" CMOS
Effective Pixels	5 Megapixels
Electronic Shutter	AUTO
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 30fps@5MP(2592x1944)/4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Optional
Smart Event	Human Detection Motion Detection
IR Led	
IR Led	12xΦ5 IR Leds
IR Distance	10-15 M
Lens	
Focal length	3.7mm Pin-hole lens
Optional Function	
POE, Audio, etc.	
Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SNMP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox 32bit ESR, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH