

# iXVR544L-32-4KL

## 32CH Penta-brid 4K Value/5MP 1.5U 4HDDs WizSense Digital Video Recorder



**WizSense**

Launched by Blue|Line Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

### Series Overview

Technology, a world-leading video-centric smart IoT solution and service provider, debuted its new XVR series, XVR5XXX-4KL-I3 Series featuring max.full-channel SMD Plus to benefit customers from AI upgrade (The number of channels differs depending on the model. Please refer to the specifications below for information on the number of channels.). This series has been developed to reduce false-alarm rates and the cost of human surveillance, thus bringing great value to customers in search of products with accurate human/vehicle alarm to raise the security level of various indoor and outdoor facilities.

### Functions

#### Face Recognition

Face Recognition technology extracts the features of captured faces and compares them with that in face database to recognize the person identity.

\*Face Recognition conflicts with SMD Plus and Perimeter Protection.


#### Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

#### SMD Plus

With intelligent algorithm, Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

- H.265+/H.265 dual-stream video compression.
- Supports 32-channel AI-Coding.
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs.
- Max 32 channels IP camera inputs, each channel up to 12MP; Max 128 Mbps incoming bandwidth.
- Up to 12 channels video stream (analog channel) perimeter protection.
- Up to 32 channels video stream (analog channel) SMD plus.
- Up to 6 channels video stream (analog channel) human face recognition.
- IoT & POS functionalities.

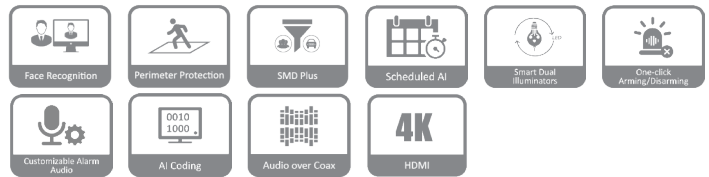

#### Scheduled AI

This technology allows multiple AI functions to be set for one channel based on time frames, eliminating the need to manually configure the system to switch between functions each time. Scheduled AI greatly increases efficiency and widens the number of scenarios that the device can be used in.

#### Smart Dual Illuminators

With Smart Dual Illuminators technology, you can select Smart Illumination Mode for the system to automatically switch between IR mode and white light mode. It allows white light to be turned on when a target is detected by the SMD Plus/Perimeter Protection function of AI-enabled XVR. This significantly reduces light pollution at night. Together with other modes, including IR Mode and White Light Mode, the smart dual illumination technology can meet the requirements of a wide variety of scenes.

#### One-click Arming/Disarming

With just one click, you can enable or disable alarm linkages to show messages, send emails, output audio alarms and more, through the mobile app and platform.

#### Customizable Alarm Audio

Designed for your convenience, the TiOC alarm can be customized to meet your needs. It is flexible, allowing you to directly upload your customized audio through the mobile app and XVR.

#### AI Coding

Compared with H.265/H.264, AI coding can reduce more than 50% bit rate and storage requirements without loss of decoding compatibility, providing clear human and vehicle details.

#### Audio over Coax

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

# iXVR544L-32-4KL



## 32CH Penta-brid 4K Value/5MP 1.5U 4HDDs WizSense Digital Video Recorder

### Technical Specification

#### System

|                     |                            |
|---------------------|----------------------------|
| Main Processor      | Industrial-grade processor |
| Operating System    | Embedded Linux             |
| Operating Interface | Web; Local GUI             |

#### Perimeter Protection

|   |  |
|---|--|
| Perimeter Performance AI by Recorder (Number of Channels) | Advanced Model: 6 channels, 10 IVS for each channel<br>General Model: 12 channels, 10 IVS for each channel |
|---|--|

#### Face Detection

|   |   |
|---|---|
| Face Attributes   | Gender; age group; glasses; expressions; face mask; beard |
| Face Detection Performance of AI by Recorder (Number of Channels) | 6 channels (up to 12 face images/s each channel)          |

#### Face Recognition

|   |   |
|---|---|
| Face Database Capacity  | Up to 10 face databases with 20,000 face images in total. Name, gender, birthday, address, certificate type, certificate No., countries & regions and state can be added to each face image |
| Face Recognition Performance of AI by Recorder (Number of Channels) | 6 channels  |

#### SMD Plus

|                      |  |
|----------------------|--|
| SMD Plus by Recorder | 32 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change |
|----------------------|--|

#### Audio and Video

|                     |  |
|---------------------|--|
| Analog Camera Input | 32 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect  |
| Camera Input        | 1. CVI: 4K@25/30 fps; 6 MP@20 fps; 5 MP@20 fps; 5 MP@25 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps; 720p@50/60 fps. 2. TVI: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps. 3. AHD: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps |
| IP Camera Input     | Up to 32 channels of IPC access<br>32 channels (analog channels are converted to IP channels)<br>incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps  |
| Encoding Capacity   | Main stream:<br>4K@(1fps-7fps); 6 MP@(1fps-10fps); 5 MP@(1fps-12fps); 4K-N, 4 MP, 3 MP@(1fps-15fps); 4M-N, 1080p, 720p, 960H, D1, CIF@(1fps-25/30fps);<br>Sub stream: 960H@(1fps-15fps); D1/CIF@(1fps-25/30fps)  |
| Dual-stream         | Yes  |
| Video Bit Rate      | 32 kbps-6144 kbps  |
| Audio Sampling      | 8 kHz, 16 bit  |
| Audio Bit Rate      | 64 kbps  |

#### Video Output

2 HDMI, 1 VGA, 1 TV  
VGA/HDMI2: 1920 × 1080, 1280 × 1024, 1280 × 720  
HDMI1: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720  
\*Heterogeneous video sources output for HDMI2 is configurable.

#### Multi-screen Display

1/4/8/9/16/25/36

#### Third-party Camera Access

ONVIF; Panasonic; Sony; Axis; Arecont; Samsung

#### Compression Standard

##### Video Compression

AI Coding; Smart H.265+; H.265; Smart H.264+; H.264

##### Audio Compression

G.711a; G.711u; PCM

#### Network

|                     |   |
|---------------------|---|
| Network Protocol    | HTTP; HTTPS; TCP/IP; IPv4; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS; P2P |
| Mobile Phone Access | IOS; Android  |
| Interoperability    | ONVIF 22.12(Profile T; Profile S; Profile G); CGI; SDK                |
| Browser             | Chrome, IE9 or later, Firefox   |
| Network Mode        | Single-address mode   |

#### Recording Playback

|                    |  |
|--------------------|--|
| Record Mode        | General, motion detection; intelligent; alarm; POS   |
| Recording Playback | 1/4/9/16   |
| Backup Method      | USB device and network   |
| Playback Mode      | Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection) |

#### Storage

|            |     |
|------------|-----|
| Disk Group | Yes |
|------------|-----|

#### Alarm

|                   |  |
|-------------------|--|
| General Alarm     | Motion detection; video loss; tampering; local alarm   |
| Anomaly Alarm     | No disk; storage error; disk full; camera offline; IP conflict; MAC conflict   |
| Intelligent Alarm | Face detection; face recognition; perimeter protection   |
| Alarm Linkage     | Record; snapshot (panoramic); IPC external alarm output; access controller; voice prompt; buzzer; log; preset; email |

#### Ports

|               |   |
|---------------|---|
| TV Output     | 1 channel   |
| Audio Input   | 4-channel BNC<br>32-channel BNC (Coaxial Audio)   |
| Audio Output  | 1-channel BNC   |
| Two-way Talk  | 1-channel BNC   |
| Alarm Input   | 16 channels   |
| Alarm Output  | 6 channels (5-channel relay output, 1-channel 12 V 1 A output)  |
| HDD Interface | 4 SATA ports, up to 16TB capacity for each disk. The maximum HDD capacity varies with environment temperature |

# iXVR544L-32-4KL




## 32CH Penta-brid 4K Value/5MP 1.5U 4HDDs WizSense Digital Video Recorder

|              |  |
|--------------|--|
| eSATA        | 1  |
| RS-232       | 1 port, for PC Communication & Keyboard        |
| RS-485       | 1 port, for PTZ control                        |
| USB          | 3 (1 front USB 2.0 port, 2 rear USB 3.0 ports) |
| HDMI         | 2  |
| VGA          | 1  |
| Network Port | 1 (10/100/1000 Mbps Ethernet port, RJ-45)      |

### General

|                       |  |
|-----------------------|--|
| Power Supply          | 100-240 VAC, 50/60 Hz  |
| Power Consumption     | <30 W (without HDD)  |
| Net Weight            | 4.90 kg (10.81 lb)   |
| Gross Weight          | 7.20 kg (15.88 lb)   |
| Product Dimensions    | 440.0 mm × 420.2 mm × 76.0 mm (17.32" × 16.54" × 2.99") (W × D × H)  |
| Packaging Dimensions  | 529.0 mm × 499.0 mm × 211.0 mm (20.83" × 19.65" × 8.31") (W × D × H)   |
| Operating Temperature | -10 °C to +55 °C (14 °F to +131 °F)  |
| Operating Humidity    | 10%–90% (RH)   |
| Installation          | Rack or desktop  |
| Certifications        | CE: CE-LVD: EN 60950-1/IEC 60950-1<br>CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024<br>FCC: Part 15 Subpart B |


### Dimensions (mm[inch])

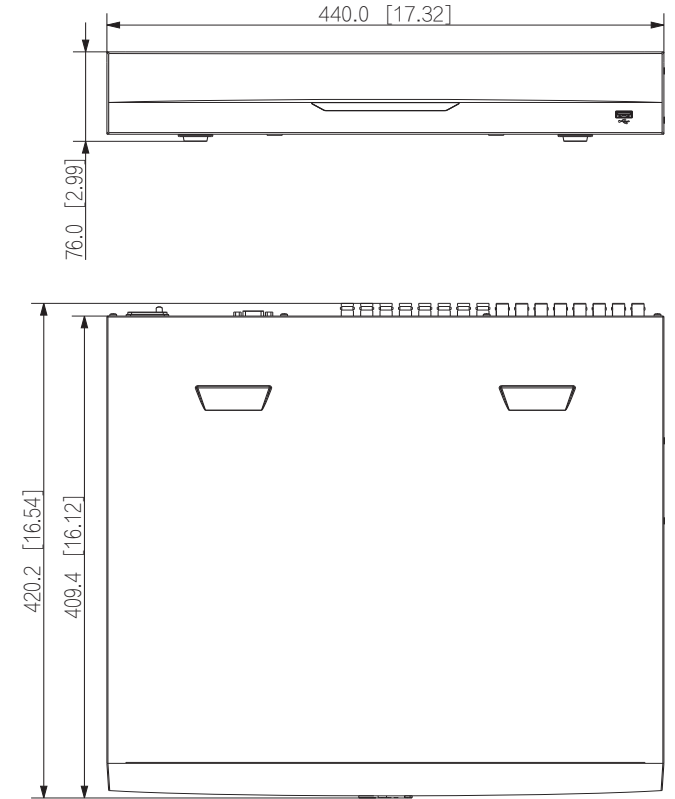

### Ordering Information

| Type                        | Model           | Description  |
|-----------------------------|-----------------|--|
| 32 Channels<br>WizSense XVR | iXVR544L-32-4KL | 32CH Penta-brid 4K Value/5MP<br>1.5U 4HDDs WizSense Digital Video Recorder |

### Panels

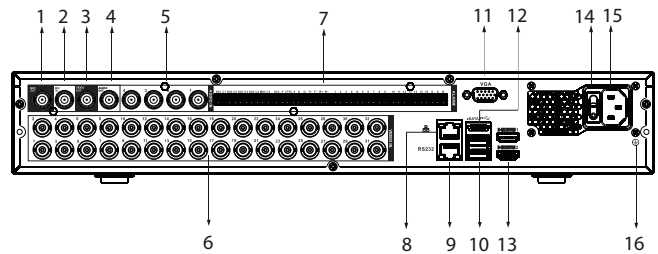

- |                           |                            |
|---------------------------|----------------------------|
| 1 MIC OUT, BNC Connector  | 2 MIC IN, BNC Connector    |
| 3 VIDEO OUT               | 4 AUDIO OUT, BNC Connector |
| 5 AUDIO IN, BNC Connector | 6 VIDEO IN                 |
| 7 Alarm In/Out            | 8 Network Port             |
| 9 RS-232 Port             | 10 USB Ports               |
| 11 VGA Port               | 12 eSATA Port              |
| 13 HDMI Ports             | 14 Power Switch            |
| 15 Power Input            | 16 Ground                  |