

IPC-HFW4100S

1.3Megapixel 720P Water-proof IR Camera



Features

- 1/3" 1.3Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switchable
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR,
- 3.6mm fixed lens
- Max. IR LEDs length 20m, Smart IR
- IP66, DC12V



IPC-HFW4100S

Technical Specifications

Model	IPC-HFW4100SN
Camera	
Image Sensor	1/3" 1.3Megapixel CMOS
Effective Pixels	1280(H)×960(V)
Electronic Shutter	4/30~1/54,000s
Video Frame Rate	30/60fps@720P
Synchronization	Internal
Min. Illumination	0.01Lux@F1.2(0Lux IR LED on)
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)
Camera Features	
Max. IR LEDs Length	20m, Smart IR
Day/Night	Auto(ICR)/ B&W/ Color
Noise Reduction	2D/3D
OSD Menu	Support
Lens	
Focal length	3.6mm
Mount Type	M12
General	
Power Supply	DC12V±10%
Power Consumption	Max 4.2W
Working Environment	-30°C~+60°C/ Less than 95%RH (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP66
Dimensions(W×D×H)	Φ65mm×154.7mm
Weight	380g
Others	Default: bracket included

IPC-HFW4100SN

Dimensions (mm)

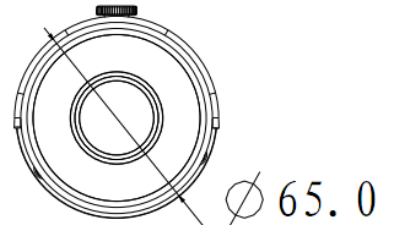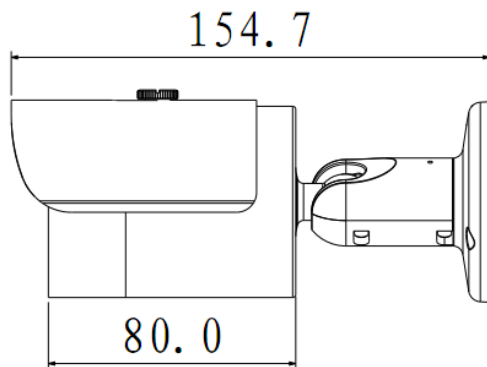

Accessories (optional)



Winic Technologies USA Inc.

42 Central avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email: sales@winictech.com

www.winictech.com

*Design and specifications are subject to change without notice.