


W-90S RG59U

75 Ohm Siamese Cable, Series 59 , Standard shield jacket

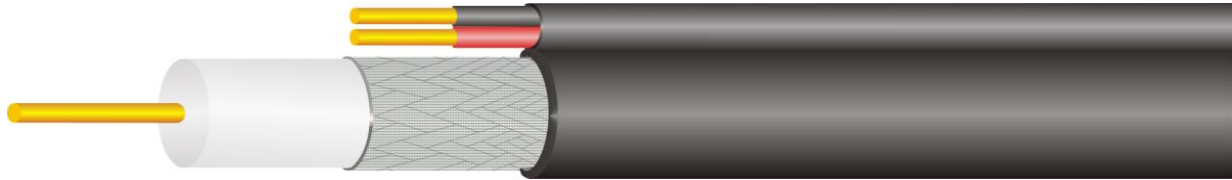

Constrution	Material	Diameter (mm)
Inner Conductor	Copper	0.81
Dielectric	Foam PE	3.70
Braid	36AWG CCA wire Braid	95%
Jacket	PVC	6.1 ±0.2
Siamese Inner Conductor	Cu	4*0.38
Siamese Jacket	Cca	3*0.38
	PE	1.8±0.1

Electrical Characteristics

Impedance	75±5.0 Ohms
Return Loss	
5-1000 MHz	≤20dB
1000-3000 MHz	≤15dB

Attenuation(20°C/(68 °F))(Max Value:±/-10%)

Frequency (MHz)	Norminal (db/100ft)
5	0.96
55	1.98
100	2.62
211	3.80
250	4.16
270	4.35
300	4.58
330	4.82
350	4.97
400	5.36
450	5.72
500	6.06
550	6.38
600	6.71
750	7.57
870	8.02
1000	8.86

Winic Technologies USA Inc.

42 Central avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email:sales@winictech.com

www.winictech.com

*Design and specifications are subject to change without notice.