


W-95S RG59U

75 Ohm Siamese Cable, Series 59 , Standard shield,black PVC jacket

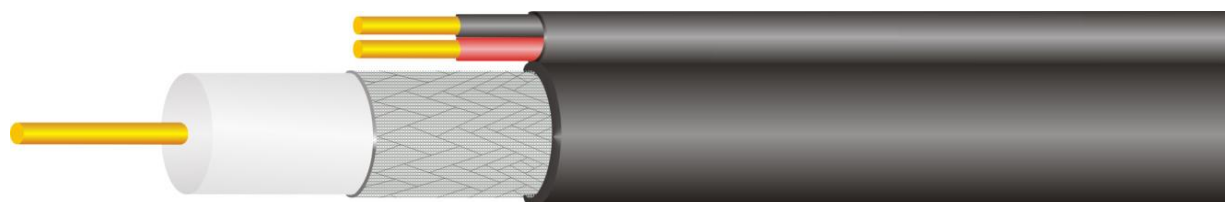

Constrution	Material	Diameter (mm)
Inner Conductor	Copper clad	0.81
Dielectric	Steel Foam PE	3.70
Braid	36AWG CCA wire Braid	86%
Jacket	PVC	6.1 ±0.2
Siamese Inner Conductor	CCA	7*0.38
Siamese Jacket	PE	1.8±0.1

Electrical Characteristics

Impedance	75±5.0 Ohms
Return Loss	
5-1000 MHz	≤20dB
1000-3000 MHz	≤15dB

Attenuation(20°C/(68 °F))

Frequency (MHz)	Norminal (db/100ft)
5	1.34
55	2.57
100	2.88
211	3.80
250	4.16
270	4.35
300	4.58
330	4.82
350	4.97
400	5.36
450	5.72
500	6.06
550	6.38
600	6.71
750	7.57
870	8.02
1000	8.86

Winic Technologies USA Inc.

42 Central avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email:sales@winictech.com

www.winictech.com