




# W-24VAC-18P/10A

## Camera Power Supply

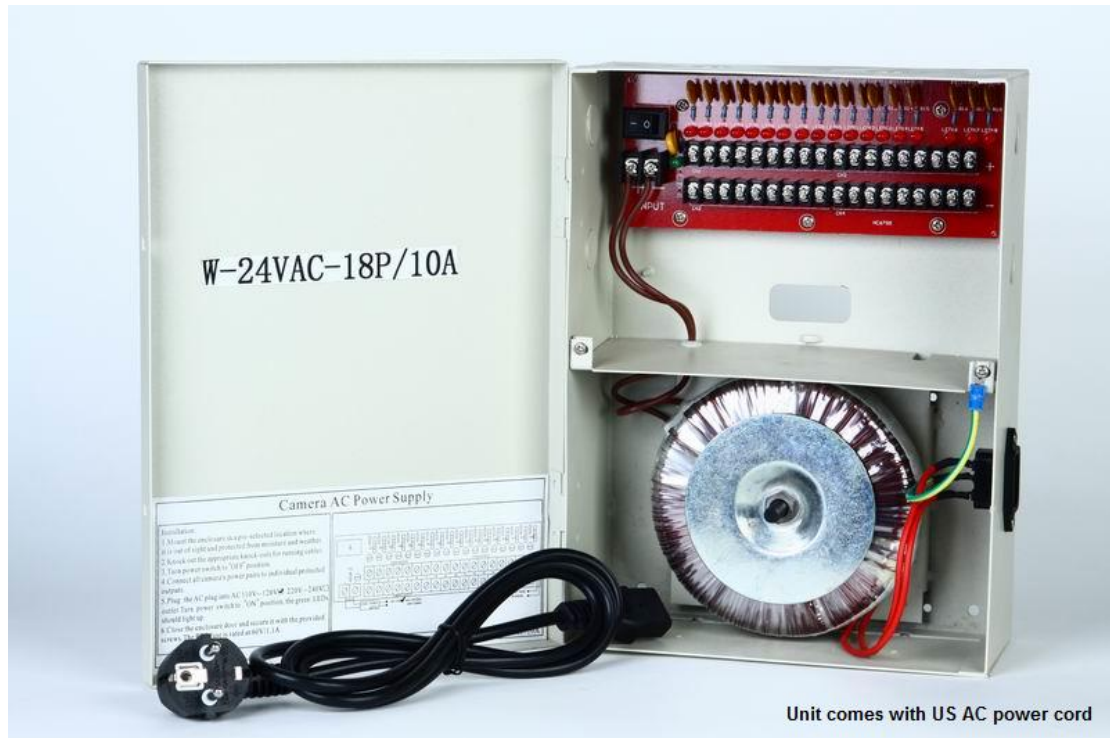

### Model

**W-24VAC-18P/10A**

### Features

- > Input 110/120 VAC
- > Output 24V DC, 18channels
- > 10 Amp Supply Current
- > Integral Surge Protection
- > Individual LED Power Indication
- > Individual PTC Output Protection
- > Max. Amp: 1.1Amp/ch

# W-24VAC-18P/10A



## Specifications

Model	W-24VAC-18P/10A	
Specification	240W24V10A18P	
Shape Dimension	28×20.8×8.7cm	
Weight	4.78kg	
Input	Input Voltage	110/120VAC
	Input Voltage Frequency	60Hz
Output	Output Voltage	24VAC±5%
	Output Current	10A, 18channels for 18sets load
Fuse	Type /Rating	PTC 1.1A/60V
Protection	Over current protection	When over current occurs, the corresponding channel output will automatically switch to self-protection status, and the other channels output work normally, when condition removed, then switch back to normal.
	short-circuit protection	When short-circuit occurs, individual PTC fuse will open the circuit, when condition removed, PTC fuse will automatically back to close.
Circumstances	Working Temperature	0℃~+40℃
	Storage temperature	-20℃~+85℃
	RH	5%~95%
	Heat release	Natural heat dissipation
Connection	Input	three-pin socket
	Output	18channels output

---

### Winic Technologies USA Inc.

42 Central Avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email:sales@winictech.com

[www.winictech.com](http://www.winictech.com)

\*Design and specifications are subject to change without notice.