

VTO2000C

Module Outdoor Station



Features

- HD CMOS camera
- Stainless steel panel, IP54,IK07
- Night vision & Voice indication
- Video & Audio messaging
- Modular design(Max 9 modules, VTO2000A-C needed)
- Surface mounted & Flush mounted

Module Outdoor Station

Technical Specification

Mode	VTO2000A-C
------	------------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
Image Sensor	1/3" 1.3MP CMOS
Lens	2.8mm
Angle of View	D:120° H:90°
Day/Night	Color Image

Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Operation Mode

Keypad	Mechanical Button
--------	-------------------

Interface

Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1

Network

Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP


General

Ingress Protection	IP54, IK07
Tamper Switch	1
Installation	Surface & Flush
Material	Stainless Steel
Power	DC 12V
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	110.7mm×118.1mm×42.3mm
Weight	0.36Kg


VTO2000C

Module Outdoor Station


Dimensions



VTO2000A-C front panel and rear panel

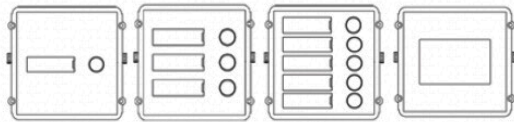


VTO2000A-B1 VTO2000A-B VTO2000A-B5 VTO2000A-E



VTO2000A-R VTO2000A-K VTO2000A-F Rear panel

View Area

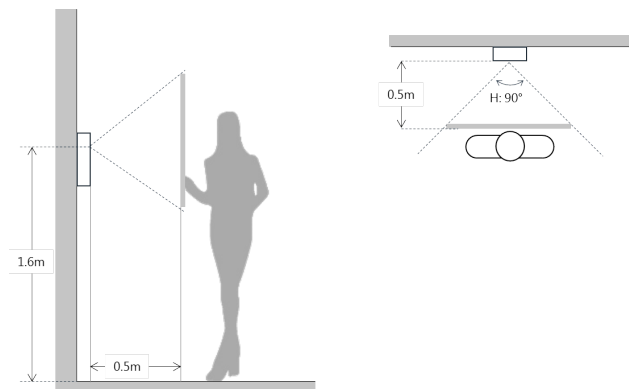

Application

