

AR726-32

Self-adaptive Turbo HD DVR



Key Features

- Support H.265 Pro+/H.265 Pro/H.265 video compression.
- Support HDTV/ AHD/ CVI/ CVBS/ IP video input.
- Max 40/48 IP cameras input (up to 8 MP).
- Max 800 m for 1080p and 1200 m for 720p HDTV signal.
- Up to 10 TB capacity per HDD.
- Support POS triggered recording and POS information overlay.

AR726-32

Self-adaptive Turbo HD DVR

Compression and Recording

- H.265 Pro+ can improve encoding efficiency and reduce the data storage cost.
- Full channel recording at up to 8 MP resolution.

Storage and Playback

- 8 SATA interfaces and 1 eSATA interface.
- Smart search for efficient playback.
- Support the 3rd party cloud storage (Dropbox/Google Drive/Microsoft OneDrive).
- HDD supporting RAID 0, RAID 1, RAID 5, RAID 6 and RAID 10 storage scheme.

Smart Function

- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras.
- Support line crossing detection and intrusion detection of all channels, and 2-ch sudden scene change detection.

Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management.
- Output bandwidth limit configurable.

AR726-32

Self-adaptive Turbo HD DVR

Model	AR726-32
Recording	
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding resolution	8 MP/5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF
Frame rate	Main stream: 8 MP@8fps/5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)
	Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
Video bit rate	32 Kbps to 10 Mbps
Dual stream	Support
Stream type	Video, Video & Audio
Audio compression	G.711u
Audio bit rate	64 Kbps
Video and Audio	
IP video input	16-ch (up to 48-ch)
	Up to 8 MP resolution
	Support H.265+/H.265/H.264+/H.264 IP cameras
Analog video input	32-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTVI input	8 MP, 5 MP, 4 MP, 3 MP, 1080p25, 1080p30, 720p25, 720p30, 720p50, 720p60
AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30
HDCVI input	4 MP, 1080p25, 1080p30, 720p25, 720p30
CVBS input	PAL/NTSC
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
HDMI1/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
HDMI2 output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Audio input	16-ch, RCA (2.0 Vp-p, 1 KΩ)
Audio output	2-ch, RCA (Linear, 1 KΩ)
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (independent)
Synchronous playback	16-ch
Network	
Remote connections	128
Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, SNMP
Network interface	2, RJ45 10M/100M/1000M self-adaptive Ethernet interface
Auxiliary interface	
SATA	8 SATA interfaces
eSATA	Support
Capacity	Up to 10 TB capacity for each disk
Serial interface	RS-232, RS-485 (full-duplex), Keyboard
Alarm in/out	16/8

AR726-32


Self-adaptive Turbo HD DVR

USB interface	Front panel: 2 × USB 2.0 Rear panel: 1 × USB 3.0
General	
Power supply	100 to 240 VAC
Consumption (without HDD)	≤ 74 W
Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Working humidity	10% to 90%
Dimensions (W × D × H)	440 × 470 × 90 mm (17.3 × 18.5 × 3.5 inch)
Weights (without HDD)	≤ 10 kg (22.0 lb)

AR726-32

Self-adaptive Turbo HD DVR

Physical Interfaces

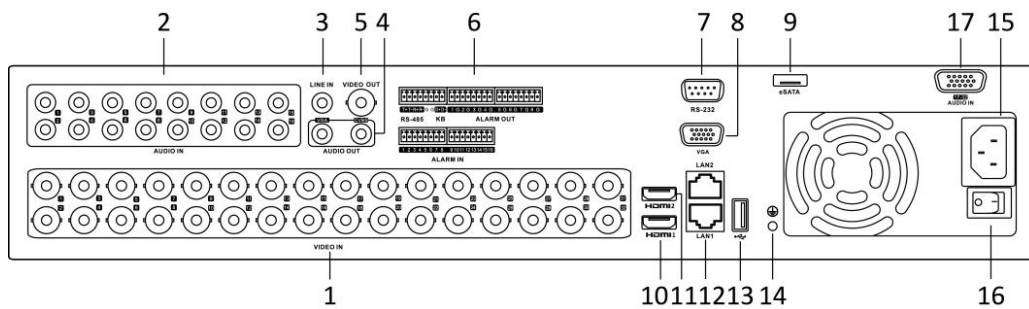

NOTE The rear panel of AR726-24 provides 24 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	10	HDMI1 Interface
2	AUDIO IN, RCA Connector	11	HDMI2 Interface
3	LINE IN	12	LAN Network Interface
4	CVBS AUDIO OUT and VGA AUDIO OUT	13	USB Interface
5	VIDEO OUT	14	GND
6	RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT	15	100 to 240 VAC Power Input
7	RS-232 Serial Interface	16	Power Switch
8	VGA Interface	17	AUDIO IN
9	eSATA Interface		